



Meeting Every Queue Management Need

DG50

Digital Calling System



The DG50 wireless system is an ideal solution that helps to improve customer service by eliminating standing queue in front of service counter. Turn numbers issued to customers help to ensure that they are served orderly and fairly.

Running serial number printed on point of sales receipt or bill can be used as turn number for calling the customers. This approach helps to eliminate the need of a ticket printer and reduces operational cost in the long run.


DG50 offers the flexibility in allowing turn numbers to be called in sequence or in random number by using a Counter Terminal. The system is well suited for

- Supermarkets
- Small clinics
- Food courts
- Utility payment counters, etc.

One or more remote Counter Displays, wirelessly linked to the Counter Terminal, display the called number to the waiting customers. A ding-dong tone helps to alert the customers when a number is called.

Features


- Affordable and easy to use
- Large display digits
- Low profile counter keypad
- Wireless connectivity simplifies the installation
- Supports up to 4 remote Counter Displays

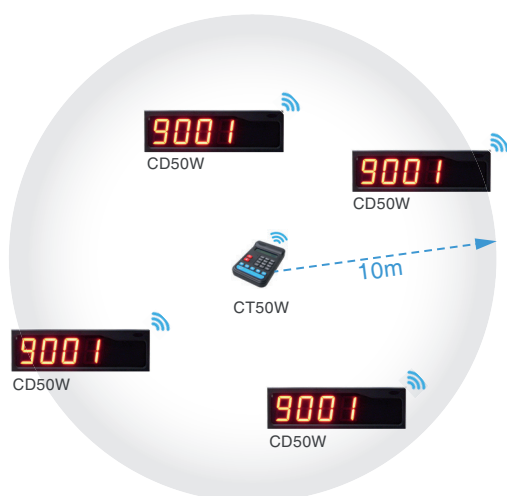

DG50 System with Multiple Displays

Technical Specifications*

Parameter	Description
Counter Terminal	
Model	CT50W
Display	1-line, 16-character LCD
Controller	Low power flash micro controller
Buzzer	Integrated
Data interface	10/100 mbps Ethernet and WiFi
Functions	Next, Call, Store, View Store (next & previous) and Delete Stored
Power consumption	1.4W
Casing	Moulded ABS plastic, dark grey
Dimension	135L x 90W x 28H mm
Weight	165g
Counter Display	
Model	CD50W
LED display	3" high, 4-digit, 7-segment super bright, red colour
Counter number	Vinyl sticker label (optional)
Speaker	Integrated
Audio tone	Electronic chime, adjustable volume
Data interface	10/100 mbps Ethernet and WiFi
Wireless range	10m
Input voltage	DC 12V
Power consumption	6W
Casing	Moulded ABS plastic, dark grey
Mounting	Wall mounted or ceiling suspended
Accessories (optional)	1" pipe and back bracket (for ceiling suspended)
Dimension, weight	Without back bracket: 124H x 434W x 38D mm, 830g With back bracket: 124H x 434W x 73D mm, 910g
Type Approval	
Certification body	SIRIM (Malaysia)
Standard	MCMC MTSFB TC T007:2014
Approval no.	CT50W: REBN/04A/1117/S(17-3516) CD50W: REBN/05A/1117/S(17-3515)
* Subject to change without prior notice	

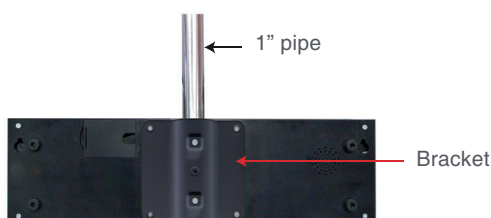

Back View

